

25  
YEARS

OUTPUT POWER WARRANTY

10  
YEARS

PRODUCT WARRANTY


### CERTIFICATES

IEC 61215/ IEC 61730  
CE/ ISO9001/ CQC

SGS



## POLY 30W

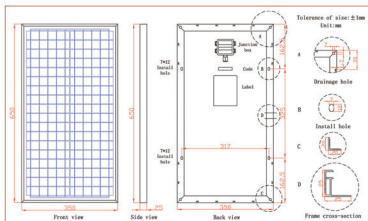

## Components & Mechanical Data

Cell(mm)	156.75*31.35Poly
Dimensions(mm)	650*350*25
No Of Cells(Pcs)	36(2*18)
Weight(Kg)	2.6
Front Glass Thickness(mm)	3.2 Tempered Glass
Certified Wind/Snow Load	2400/5400pa
Allowable Hali Load	23m/s, 7.53g
Junction Box Type	IP65 / IP67
Bypass Diode Rating(A)	10
Cable & Connector Type	MC4 Compatible Optional
Frame (Material Corners, etc)	25#
Back Sheet	TPT
Certifications	IEC 61215, IEC 61730

## Specification

Module type	CL030P6-36
Maximum Power at STC (Pmax)	30W
Maximum Power Voltage(Vmp)	17.9V
Maximum Power Current(Imp)	1.68A
Open Circuit Voltage(Voc)	21.3V
Short Circuit Current(Isc)	1.78A
Temperature Coefficients of Pmax	- 0.45% / °C
Temperature Coefficients of Voc	- 0.35% / °C
Temperature Coefficients of Isc	+0.04% / °C
Power Tolerance	+0~3%

STC



Irradiance 1000W/m<sup>2</sup>



Cell Temperature 25°C



AM=1.5

NOCT



Irradiance 800W/m<sup>2</sup>



Ambient Temperature 25°C



AM=1.5



Wind Speed 1m/s